


WAT12

Wind Transmitter

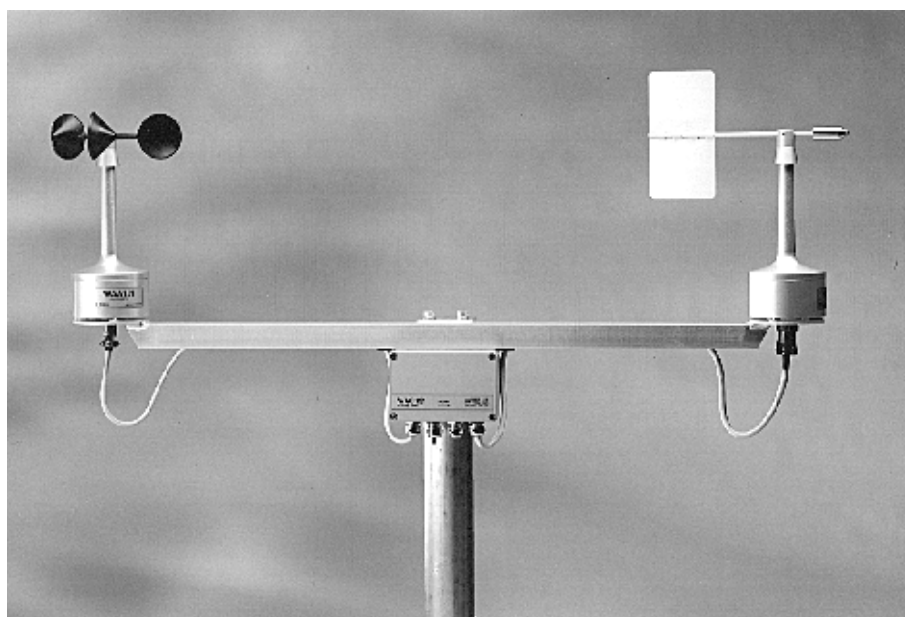

The WAT12 Wind Transmitter is an economic solution to a standard interface between Vaisala's wind sensors and analog panel meters, chart recorders, digital LCD or LED displays, data loggers, computers with analog inputs, etc. The transmitter converts the wind speed and direction data measured by the WAA151 Anemometer and the WAV151 Wind Vane into two analog current loop signals, respectively. The power to the sensors is also supplied through the WAT12 unit.

The WAT12 consists of a PC board unit in a junction box and a cross arm for mounting the wind sensors. A 4-wire cable for the wind speed and direction signals and power supply is needed between the transmitter and the receiving end.

The loop current is selectable of, e.g., 4-to-20 mA, 0-to-10 mA, and 1-to-5 mA. The loops are supplied by high-side drivers with a return to the signal & power ground; thus nearly any input type can be driven.

The transmitter accepts a wide range of input power, i.e. from 12 to 28 VDC. With 5 mA loop current selected, the total current consumed is less than 40 mA (including the sensors and the loop current), hence making it possible to remotely supply the operating power from a distance of several kilometers, even through private or leased telephone lines.

The WAT12 also provides the sensors for throughput of optional heating power. The heating power connection, if required, calls for an extra pair of wires. Since the heating elements, standardly included in the WAA and WAV sensors, typically consume some 500 mA, the heating power is most conveniently supplied from a local power source. A thermostat switch is optionally available for automatic connection of heating power below +4 °C.

TECHNICAL DATA

WAT12 WIND TRANSMITTER

Type	Digital-to-analog current loop converter for Vaisala's wind sensors	
Dimensions		
PC board	114 × 69 mm ²	
Junction box	125 (w) × 80 (h) × 57 (d) mm	
Cross arm length	800 mm	
Temperature range	operating -55 ... +55 °C storage -60 ... +70 °C	
Humidity	0 ... 100 % RH	
Signal input from sensors		
Wind direction	6-bit parallel GRAY code (optionally 7 bits)	
Wind speed	Pulse frequency 0 ... 750 Hz	
Input operating power	12 ... 28 VDC, 30 mA	
Output sensor power		
On-board regulated to	10.7 VDC typically	

Output signals

Two analog current loops, one for direction, one for speed. High-side drivers; the loops return to the common signal & power ground. Loop driving voltage 10 V typ.

Output accuracy	Better than 1 % of full scale	
Loop current options (jumper selectable)	0-5 mA; 1-5 mA 0-10 mA; 2-10 mA 0-20 mA; 4-20 mA	
Max. loop resistance	1800 ohm for 5 mA loop 900 ohm for 10 mA loop 450 ohm for 20 mA loop (incl. cable resistance + receiver's input resistance)	
Full scale options (jumper selectable)		
For direction	0 - 360°/0 - 540°	
For speed	0 - 51.2 m/s / 0 - 76.8 m/s	
Signal cable	4 wires minimum (Vin+, Vin-, DOP, SOP)	
Mounting	to a Ø 60 mm pole mast	
Weight	1.5 kg	
Material	Cross arm AI anodized Junction box AI painted grey	



Internet:
<http://www.vaisala.com>

Head Office:
VAISALA Oy
PL 26, FIN-00421 Helsinki
FINLAND
Phone (int.): (+358 9) 894 91
Telefax: (+358 9) 894 9227
Telex: 122832 vsala fi

VAISALA GmbH
Postfach 540267
D-22502 Hamburg
DEUTSCHLAND
Phone (nat.): (040) 858 027
Telefax: (040) 850 8444

VAISALA (UK) Ltd
Suffolk House
Fordham Road
Newmarket
Suffolk CB8 7AA
UNITED KINGDOM
Phone (nat.): (01638) 674 400
Telefax: (01638) 674 411

VAISALA TMI Ltd
Vaisala House
349 Bristol Road
Birmingham B5 7SW
UNITED KINGDOM
Phone (nat.): (0121) 683 1200
Telefax: (0121) 683 1299

VAISALA SA
3, Parc Ariane
Saint-Quentin-En-Yvelines
F-78284 Guyancourt Cedex
FRANCE
Phone (nat.): (1) 3057 2728
Telefax: (1) 3096 0858

VAISALA Inc.
100 Commerce Way
Woburn, MA 01801 - 1068
USA
Phone (nat.): (617) 933 4500
Telefax: (617) 933 8029

VAISALA Inc.
Artais Division
7450 Industrial Parkway
Plain City, OH 43064 - 9005
USA
Phone (nat.): (614) 873 6880
Telefax: (614) 873 6890

VAISALA KK
42 Kagurazaka 6-Chome
Shinjuku-Ku,
Tokyo 162
JAPAN
Phone (nat.): (03) 3266 9611
Telefax: (03) 3266 9610

VAISALA Pty. Ltd.
3 Guest Street
Hawthorn, VIC 3122
AUSTRALIA
Phone (nat.): (3) 9818 4200
Telefax: (3) 9818 4522

VAISALA Beijing
Representative Office
Room 518, 520
Wangfujing Grand Hotel
No. 57 Wangfujing Street
Beijing 100006
PEOPLE'S REPUBLIC OF
CHINA
Phone (nat.): (10) 6522 4050
Telefax: (10) 6522 4051